

INDUSTRIAL CONTROL



VISUALIZE




## ITP1215-20



- Fanless industrial Touchpanel Display
- 21.5", Full-HD
- 10point PCAP Touch
- IP65 Front
- Easy to assemble by 14x M5 bolts

ITP1215 is a 21.5" industrial Display with PCAP Touchpanel and multiple outputs: Displayport, DVI and VGA output

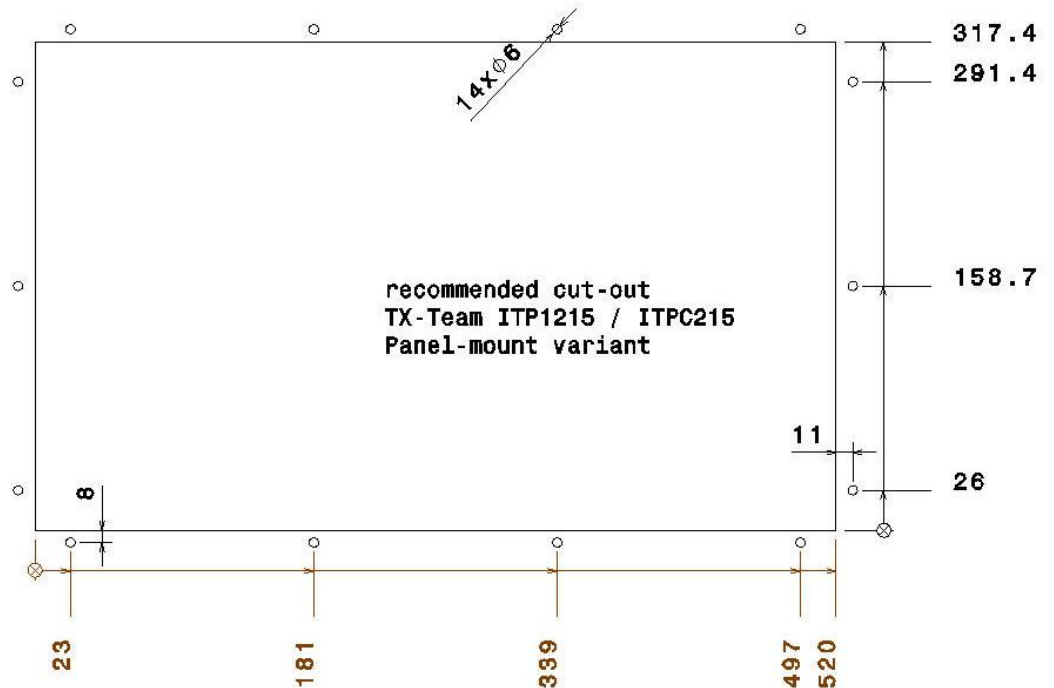

## Factsheet

### Physical properties

Display & Chassis	21.5" LED Display, PCAP 10 point Multitouch, 1920x1080px @ 60Hz (Full-HD), 300cd/m <sup>2</sup> typ. Brightness, 5000:1 typ. Contrast Full-aluminium chassis, frame 5mm thickness, Protective Glassfront (chemical resistant), Front IP65 protected
Dimensions	553.9x345.4x56 mm (WxDxH)
Cooling	Passive
Mounting options*	Panel-mount VESA mount optional Easy assembly by only 14x pre-assembled threaded bolts
Weight	6 kg

### Hardware

Formfactor	proprietary
CPU	n.a.
RAM	n.a.
Storage	n.a.
Graphics	n.a.

### Communication

WLAN*	n.a.
LTE*	n.a.
Others	n.a.

### I/O

I/O front	-
I/O back	1x Displayport, 1x DVI, 1x VGA, 1x DC-In, 1x USB cable (1.8m, type A) for Touchpanel
I/O internal**	-

### Power supply

PSU	60W external adapter
Power input	12V..24V DC wide input, 5.5 x2.5 mm barrel plug 12...24V DC wide input, PhoenixContact plug (optional), delivered without power supply
Redundancy	-
Power draw	Idle: ~1W, full-load: ~8W

### Compatibility

OS	n.a.
Others	-

### Environment

Operating temp. range / Humidity	0..60°C / 10...95%, non-condensing
Protection class	IP50

### Compliance

Conformity	CE, RoHS, REACH
------------	-----------------

### General

Scope of delivery	Display, documentation, PSU, certificate of conformity
Language	EN, DE
Long-term-availability	Until 2030
Warranty	3 years, 4/5 years*
Country of Origin	Germany
Tariff code	84715000